



ATMO^{kustik} 20/15



Achsraster	20 mm
Bohr-Durchmesser	15 mm
Perforation	44,18 %
Akustikvlies	ja
Bedämpfung	50 mm

WANDABSTAND	α_w	ABSORBERKLASSE
250 mm	0,95	A

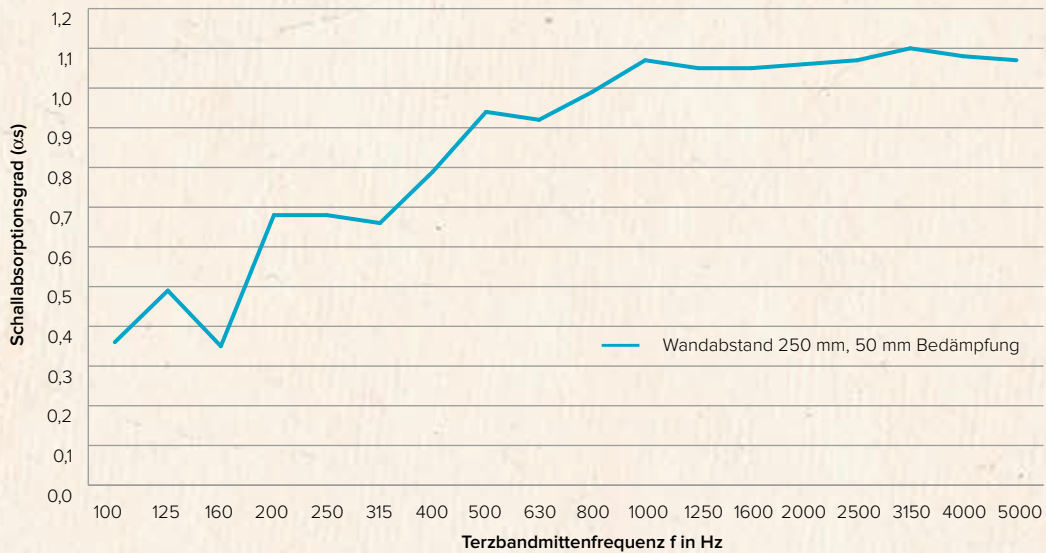

WA 250 mm	0,36	0,49	0,35	0,68	0,68	0,66	0,79	0,94	0,92	0,99	1,07	1,05	1,05	1,06	1,07	1,10	1,08	1,07
	0,40		0,65		0,90		1,05		1,05		1,10							

nach EN ISO 354