



ATMO^{kustik} 4/1,5T



Achsrastrer	4 mm
Bohr-Durchmesser	1,5 mm
Perforation	8,28 %
Akustikvlies	ja
Bedämpfung	50 mm

WANDABSTAND	α_w	ABSORBERKLASSE
250 mm	0,75	C

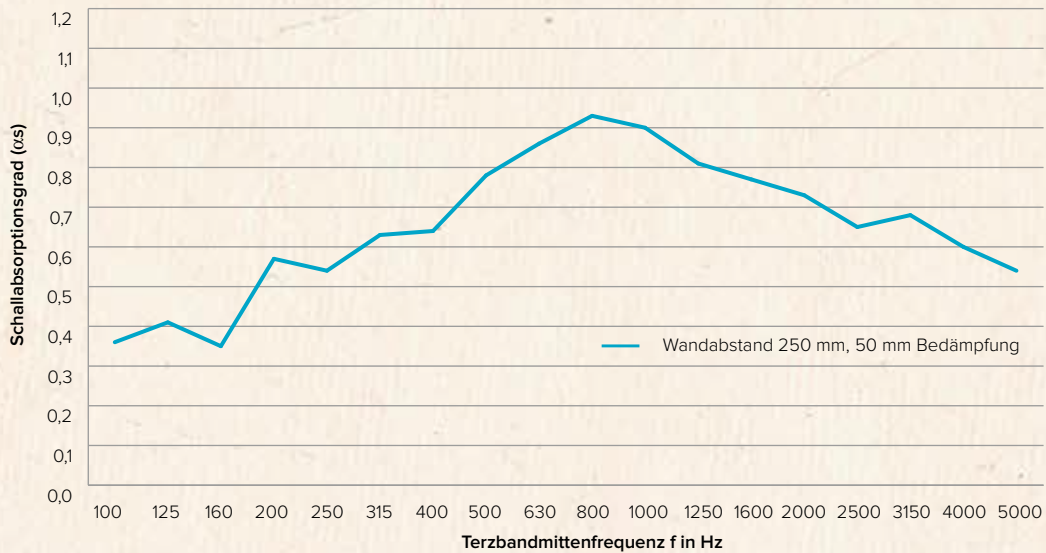

WA 250 mm	0,36	0,41	0,35	0,57	0,54	0,63	0,64	0,78	0,86	0,93	0,90	0,81	0,77	0,73	0,65	0,68	0,60	0,54
	0,35		0,60		0,75		0,90		0,70		0,60							

nach EN ISO 354