



# ATMO<sup>kustik</sup> 5,3/1,5T



Achsrastrer	5,33 mm
Bohr-Durchmesser	1,5 mm
Perforation	4,72 %
Akustikvlies	ja
Bedämpfung	50 mm

WANDABSTAND	$\alpha_w$	ABSORBERKLASSE
250 mm	0,55	D

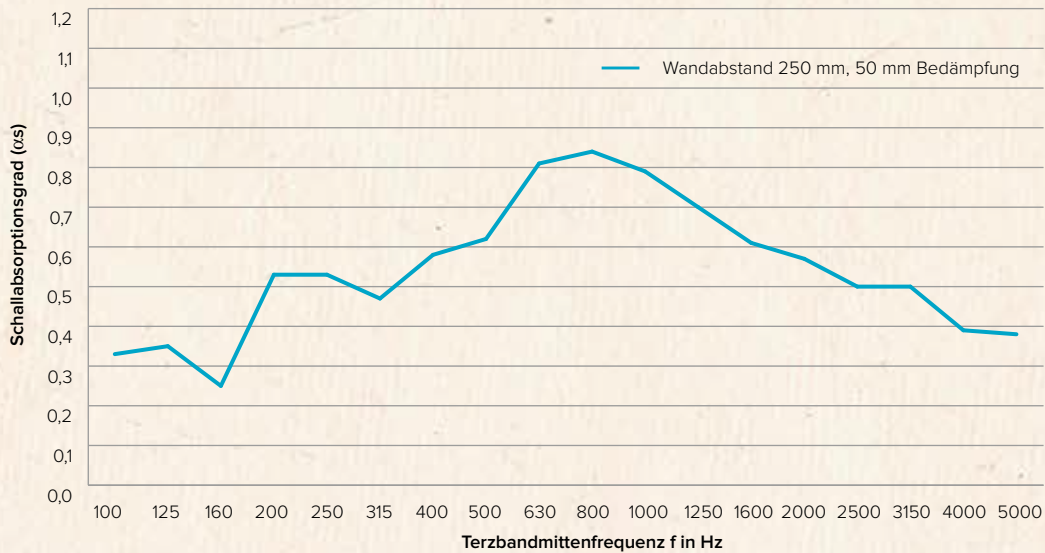

WA 250 mm	0,33	0,35	0,25	0,53	0,53	0,47	0,58	0,62	0,81	0,84	0,79	0,70	0,61	0,57	0,50	0,50	0,39	0,38
	0,30		0,50		0,65		0,80		0,55		0,40							

nach EN ISO 354