



ATMO^{phon} 4/4



Stegbreite	4 mm
Schlitzbreite	4 mm
Perforation	12,50 %
Akustikvlies	ja
Bedämpfung	50 mm

WANDABSTAND	α_w	ABSORBERKLASSE
250 mm	0,75(H)	C

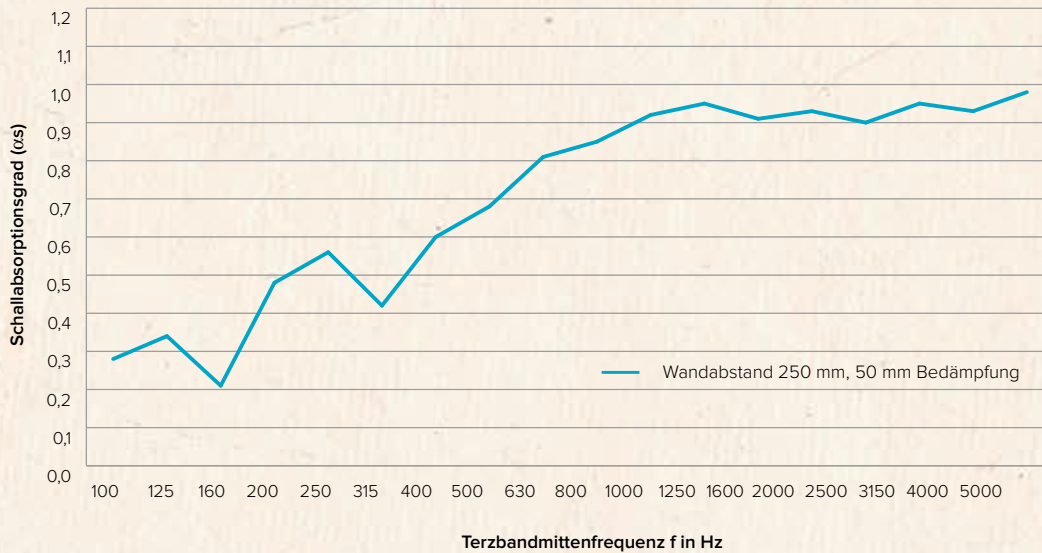

WA 250 mm	0,28	0,34	0,21	0,48	0,56	0,42	0,60	0,68	0,81	0,85	0,92	0,95	0,91	0,93	0,90	0,95	0,93	0,98
	0,30		0,50		0,70		0,90		0,90		0,95							

nach EN ISO 354