



# ATMO<sup>phon</sup> 5/3+



Stegbreite	5 mm
Schlitzbreite	3 mm
Perforation	18,75 %
Akustikvlies	ja
Bedämpfung	50 mm

WANDABSTAND	$\alpha_w$	ABSORBERKLASSE
250 mm	0,95	A

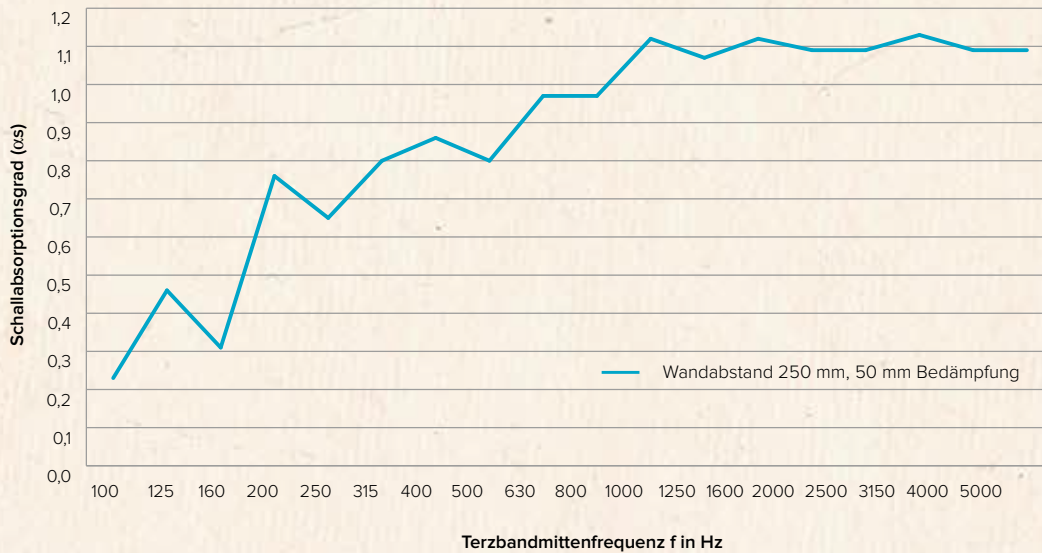

WA 250 mm	0,23	0,46	0,31	0,76	0,65	0,80	0,86	0,80	0,97	0,97	1,12	1,07	1,12	1,09	1,09	1,13	1,09	1,09	
	0,35		0,75		0,90		1,05		1,10		1,10		1,10		1,10		1,10		1,10

nach EN ISO 354