



ATMO^{phon} 6/2+



Stegbreite	6 mm
Schlitzbreite	2 mm
Perforation	12,50 %
Akustikvlies	ja
Bedämpfung	50 mm

WANDABSTAND	α_w	ABSORBERKLASSE
250 mm	0,95	A

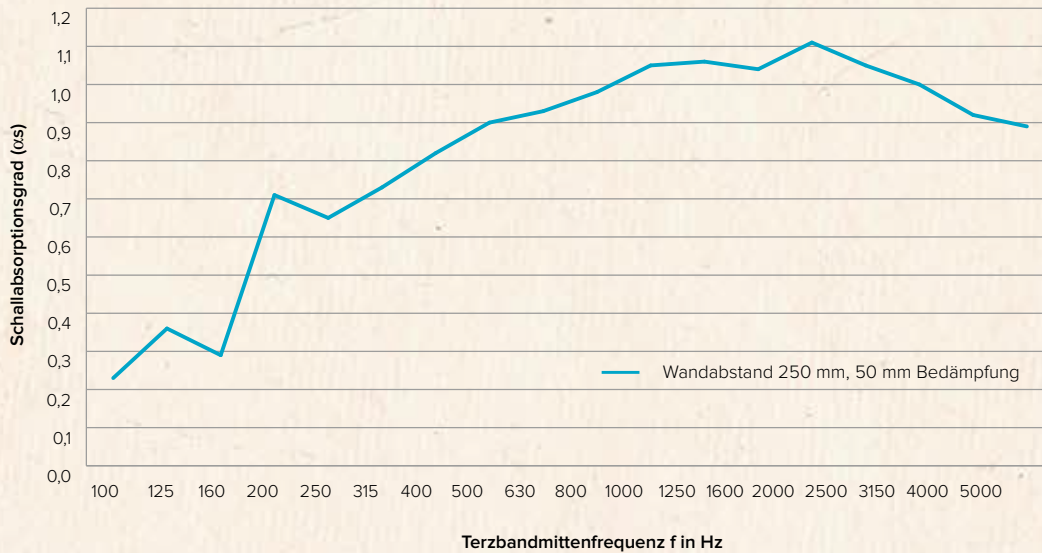

WA 250 mm	0,23	0,36	0,29	0,71	0,65	0,73	0,82	0,90	0,93	0,98	1,05	1,06	1,04	1,11	1,05	1,00	0,92	0,89
	0,30			0,70			0,90			1,00			1,00			0,95		

nach EN ISO 354